




FBE Series

CHARACTERISTICS

- Monolithic inorganic material construction.
- Closed magnetic circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quantity: 4000pcs

APPLICATION

- Data lines and low power lines
- Connection between digital and analog circuit

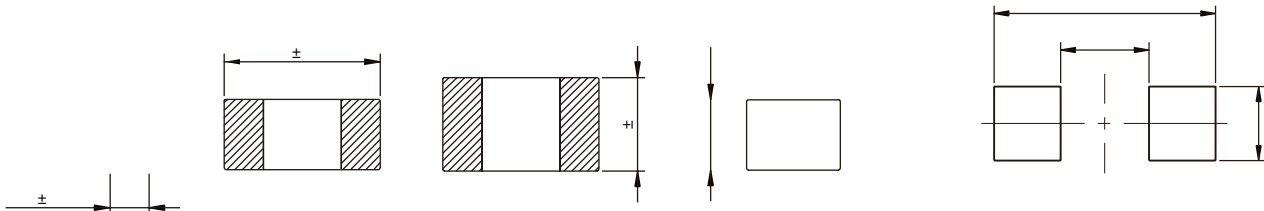

	±
	±
	±
	±
	±
	±
	±
	±
	±
	±
	±
	±
	±
	±
	±
	±



Part No	Thickness T size (mm)	Impedance @100MHz (Ω)	Tolerance	R (max) (Ω)	Temperature Rise Current (max) (mA)
	±		±25%		
	±		±25%		
	±		±25%		
	±		±25%		
	±		±25%		
	±		±25%		
	±		±25%		
	±		±25%		

Operating Temperature: -55℃ ~ +125℃
Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃

