# MD Series

## CHARACTERISTICS

- Molded type
- High satura  on current due to CIP material
- Nature air gap and no acous  c noise
- Di  erent sizes available
- Opera  ng temperature: -40 to +125 ℃
- Quan  ty: 3000pcs

## APPLICATION

-
- LC flter

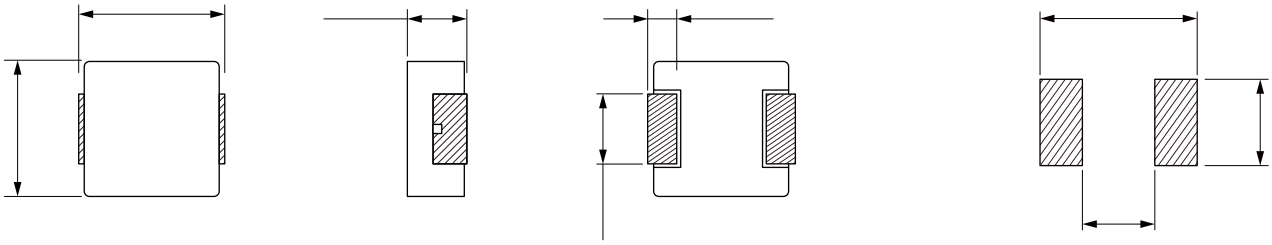

| Part No | Inductance @ 100KHz/1V | Tolerance | Temperature Rise Current Typ. | Current Typ. | DC Resistance Typ. | DC Resistance Max. |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Temperature rise current : The actual value of DC current when the temperature rise is ΔT40℃
Satura  on Current will cause L to drop approximately 30%