


MDA Series

SMD Low Profile High Current Molded Inductor

Size 4020




FEATURES

- Capable of corresponding high frequency .
- Low loss realized with low DCR.
- High performance (Isat) realized by metal dust core.
- 100% Lead(Pb)-Free and RoHS compliant.
- -# j
- \ #
- j h#o


APPLICATION

- = HVAC
-) Audio subsystem
-) Digital instrument cluster
- @ † @

Dimensions: [mm]

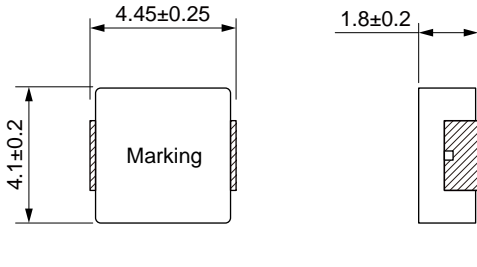

Land Pattern: [mm]

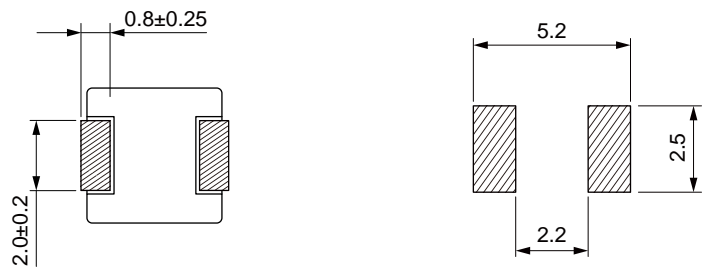


Electrical Properties:


Tolerance

| | |
|------|------|
| ±20% | 26.0 |
| ±20% | |
| ±20% | 9.0 |
| ±20% | 7.6 |
| ±20% | |
| ±20% | |
| ±20% | |
| ±20% | 2.8 |


Typical Electrical Characteristics:

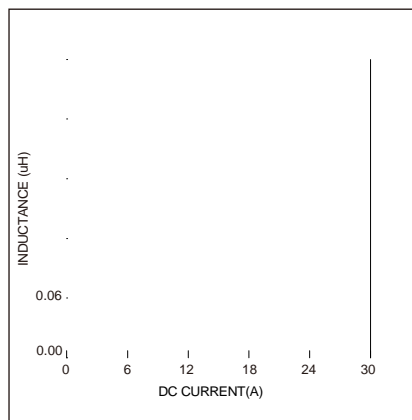


MDA 4001 SPM
KOHER Electronics
F9, No. 4188, Huaning Rd, Minhang District, Shanghai
021-34753361 Contact@kohergroup.com

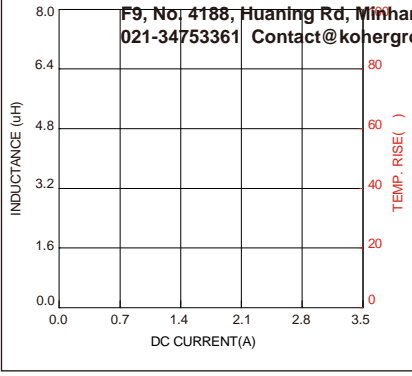

Reel Dimension : [mm]

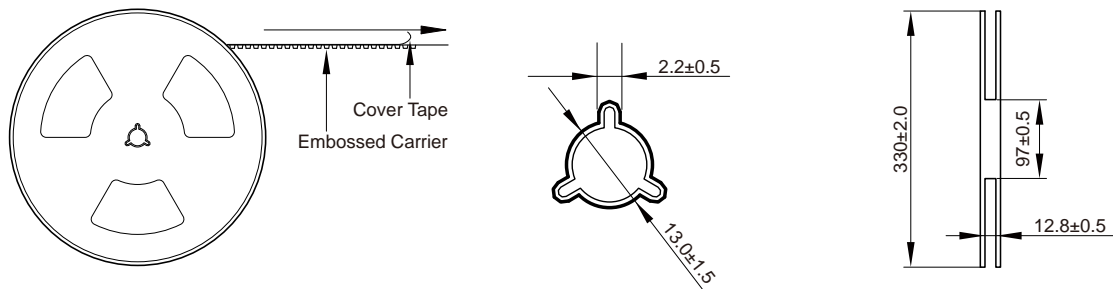

Packaging Quantity:

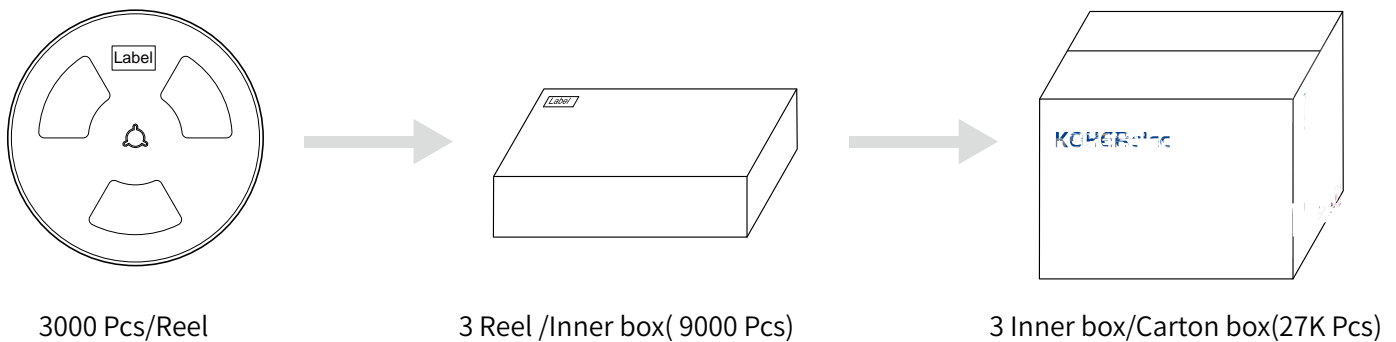

Cautions and Warnings:

Storage Conditions :

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.